

AUXILIARY  
MATE: DEUTSCH P/N DT06-12SB-\*\*\*\*

PIN	SIGNAL
1	14V+ POWER
2	MASTER CLUTCH
3	SPEED INPUT 2
4	FAN SPEED SENSOR 1
5	CHANNEL 1 CLUTCH
6	GROUND
7	GROUND
8	CHANNEL 2 CLUTCH
9	CHANNEL 3 CLUTCH
10	IMPLEMENT SWITCH INPUT
11	SPEED INPUT 3
12	14V+ POWER

CHANNEL 1  
MATE: DEUTSCH P/N DT06-08SA-\*\*\*\*

PIN	SIGNAL
1	14V+ POWER
2	SERVO OPEN
3	AUGER SPEED SIGNAL
4	AUGER SPEED GROUND
5	LEVEL SENSOR GROUND
6	LEVEL SENSOR SIGNAL
7	SERVO CLOSED
8	5V+

CHANNEL 2  
MATE: DEUTSCH P/N DT06-08SA-\*\*\*\*

PIN	SIGNAL
1	14V+ POWER
2	SERVO OPEN
3	AUGER SPEED SIGNAL
4	AUGER SPEED GROUND
5	LEVEL SENSOR GROUND
6	LEVEL SENSOR SIGNAL
7	SERVO CLOSED
8	5V+

CAN BUS  
MATE: DEUTSCH P/N DT06-4S-\*\*\*\*


PIN	SIGNAL
1	12V+ POWER
2	CAN LOW
3	GROUND
4	CAN HIGH

HIGH CURRENT POWER  
MATE: DEUTSCH P/N DTP06-2S-\*\*\*\*

PIN	SIGNAL
1	12V+ POWER
2	GROUND

CHANNEL 3  
MATE: DEUTSCH P/N DT06-08SA-\*\*\*\*

PIN	SIGNAL
1	14V+ POWER
2	SERVO OPEN
3	AUGER SPEED SIGNAL
4	AUGER SPEED GROUND
5	LEVEL SENSOR GROUND
6	LEVEL SENSOR SIGNAL
7	SERVO CLOSED
8	5V+

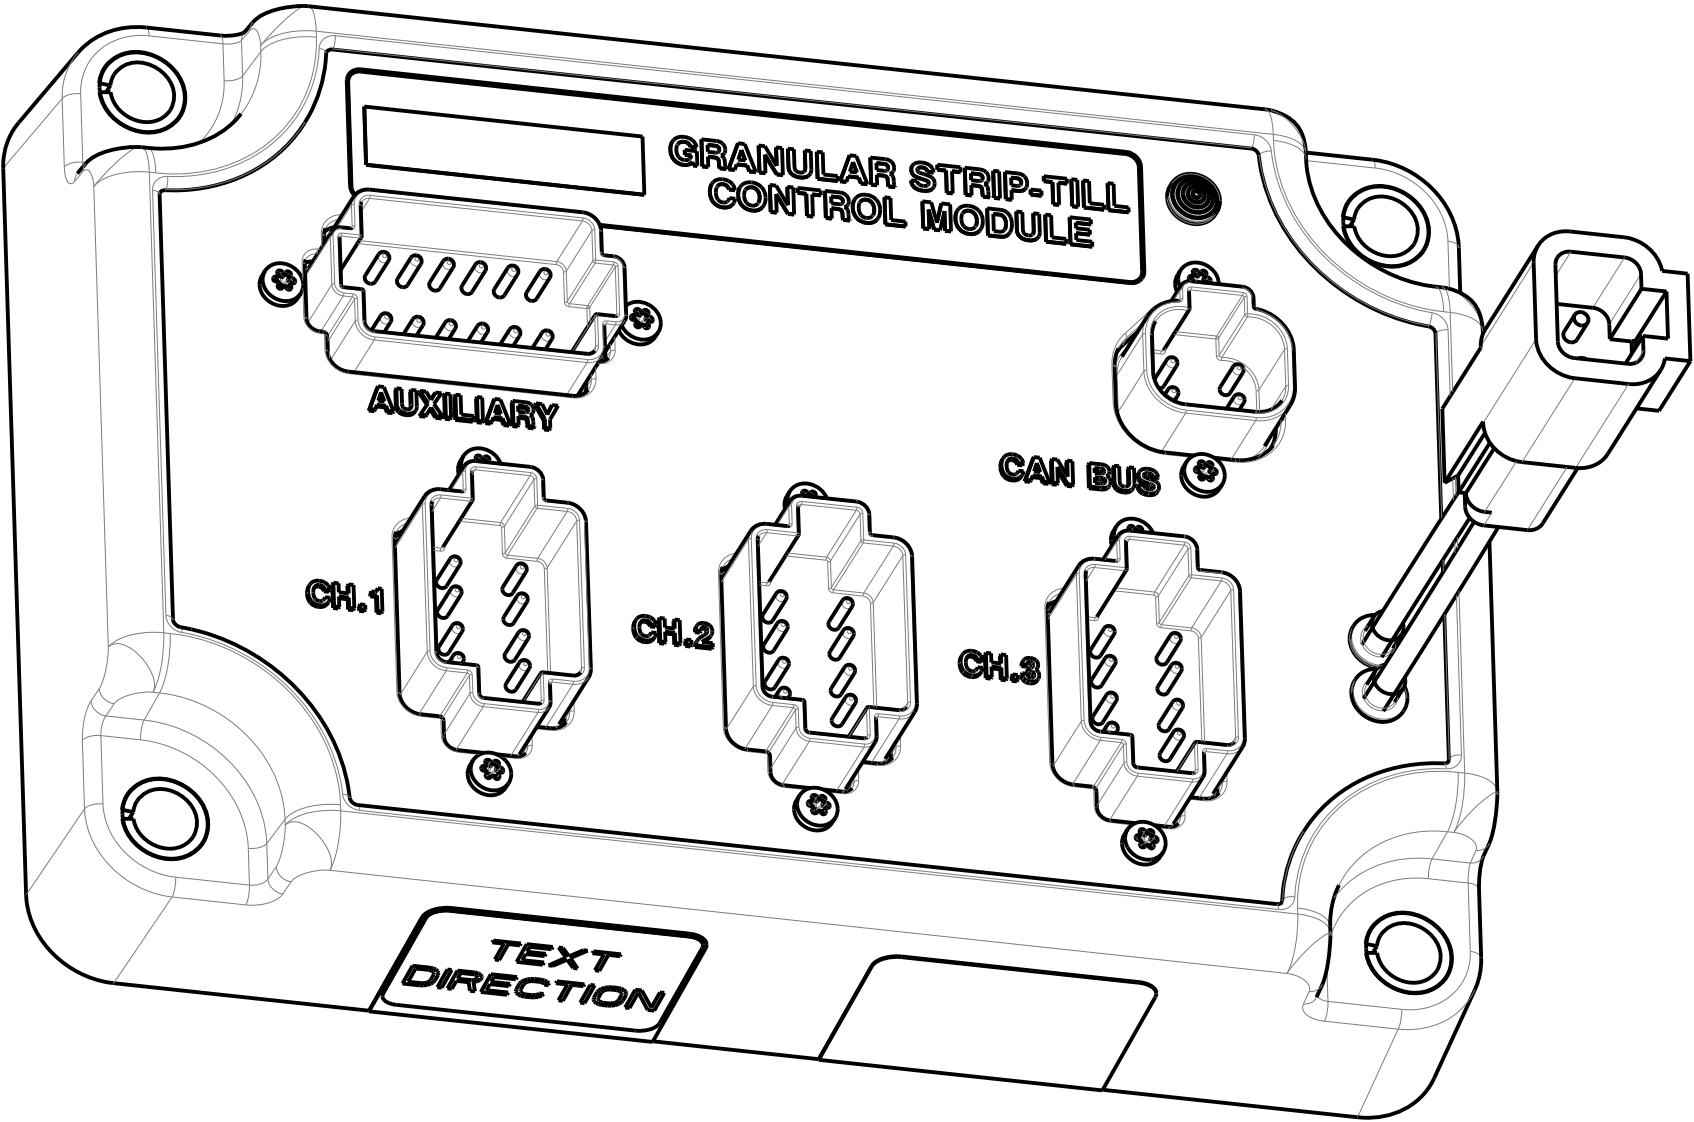

THE INFORMATION HEREON IS PROPRIETARY PROPERTY OF AG LEADER TECHNOLOGY, INC. THIS DOCUMENT IS A CONFIDENTIAL DISCLOSURE. ANY USE, EXCEPT THAT FOR WHICH IT IS LOANED, IS PROHIBITED.			<b>Ag Leader<sup>®</sup></b> Technology	
APPROX MASS	KG	UNITS:	MILLIMETERS	2202 SOUTH RIVERSIDE DR. AMES, IA 50010
METRIC TOLERANCES UNLESS OTHERWISE SPECIFIED			SEE NOTES	MATERIAL:
COMPLIANCE:			ROHS	FINISH:
THIRD ANGLE PROJECTION				NONE
SCALE			1.000	PART NOUN - DESCRIPTION:
FORMAT SIZE			B	MODULE
SHEET			1 OF 2	GRANULAR STRIP-TILL
PART NO:			4000913	REV:
				E